

030-7585-0

4

3


2

1




NOTES:
ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	Io: @ NO LOAD	INPUT 230 V, 50HZ	12.47 MAX	mA
2	Pwo: @ NO LOAD	INPUT 230 V, 50HZ	0.98 MAX	W
3	Uo: @ NO LOAD	INPUT 230 V, 50HZ	14.8 ±10%	V
4	Ie: CURRENT WITH LOAD	INPUT 230 V, 50HZ	34.13 MAX	mA
5	Pwe: WATTAGE WITH LOAD	INPUT 230 V, 50HZ	8.82 MAX	W
6	Ua: NOMINAL LOAD	INPUT 230 V, 50HZ AT LOAD 311mA	9	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:
1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS ±0.20 MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC

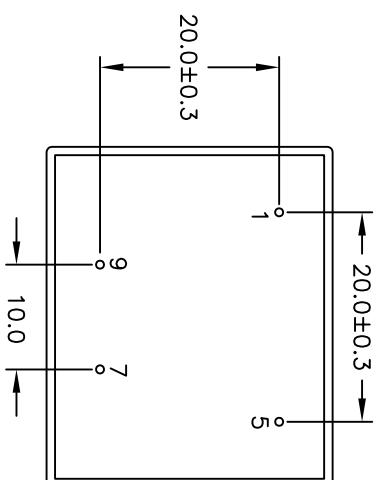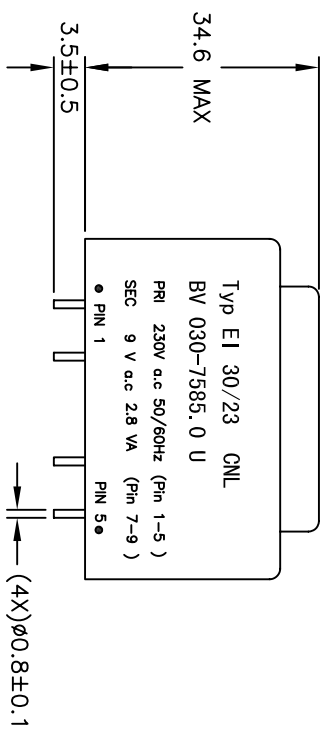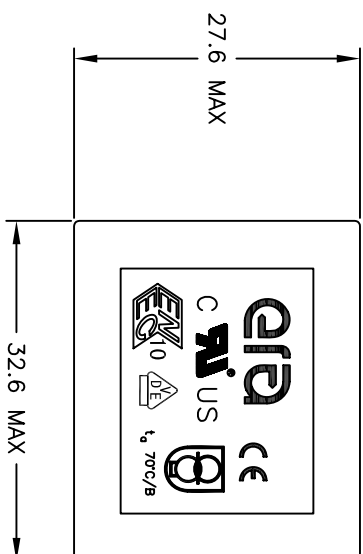

FINAL OUTLINE

~~UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCES ARE:~~
DIMENSIONS ARE IN INCHES.
DECIMALS: .XX ±.01
ANGLES: ±1°
HOLE DIA: .XXX ±.005
DO NOT SCALE DRAWINGS

SIZE: B01961
SCALE: NONE
DWG. NO.: 030-7585-0
SHEET: 1 OF 1
REV: 13

130372004

4

3

2

1