


NOTES:

ELECTRICAL CHARACTERISTICS: TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)


ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	Io: @ NO LOAD	INPUT 115 V, 50Hz	23.6 MAX	mA
2	Pwo: @ NO LOAD	INPUT 115 V, 50Hz	0.82 MAX	W
3	Uo: @ NO LOAD	INPUT 115 V, 50Hz	16.7 ±10%	V
4	Ie: CURRENT WITH LOAD	INPUT 115 V, 50Hz	39.4 MAX	mA
5	Pwe: WATTAGE WITH LOAD	INPUT 115 V, 50Hz	3.28 MAX	W
6	Ua: NOMINAL LOAD	INPUT 115 V, 50Hz AT LOAD 125 mA	12	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	

MECHANICAL SPEC NOTES:



1. ALL DIMENSIONS ARE IN MM.GENERAL TOLERANCE IS ±0.20MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC



TOP VIEW

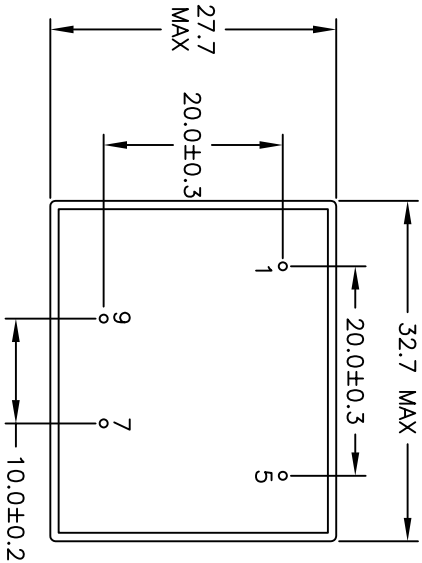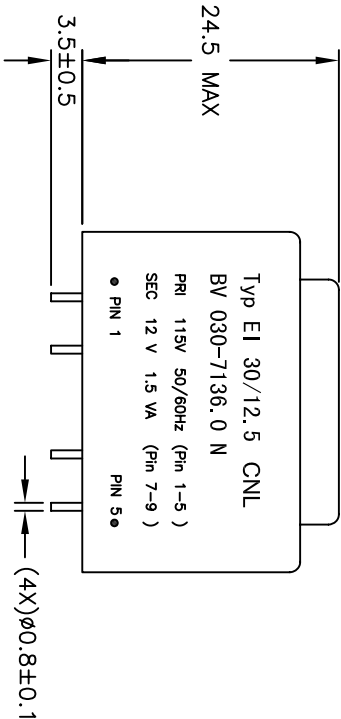

FINAL OUTLINE