


NOTES:

ELECTRICAL CHARACTERISTICS:
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)




ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I _o : @ NO LOAD	INPUT 115 V, 50Hz	24.90 MAX	mA
2	P _w _o : @ NO LOAD	INPUT 115 V, 50Hz	0.80 MAX	W
3	U _o : @ NO LOAD	INPUT 115 V, 50Hz	12.90 ±10%	V
4	I _e : CURRENT WITH LOAD	INPUT 115 V, 50Hz	34.80 MAX	mA
5	P _w _e : WATTAGE WITH LOAD	INPUT 115 V, 50Hz	3.70 MAX	W
6	U _d : NOMINAL LOAD	INPUT 115 V, 50Hz AT LOAD 166 mA	9.0	V
7	H _I -POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	
8	RATED OUTPUT POWER	/	1.5	VA

MECHANICAL SPEC NOTES:

- 1. ALL DIMENSIONS ARE IN MM,GENERAL TOLERANCE IS ±0.20MM.
- 2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC

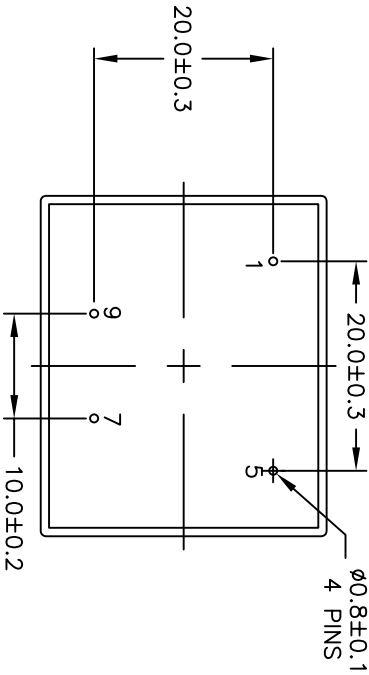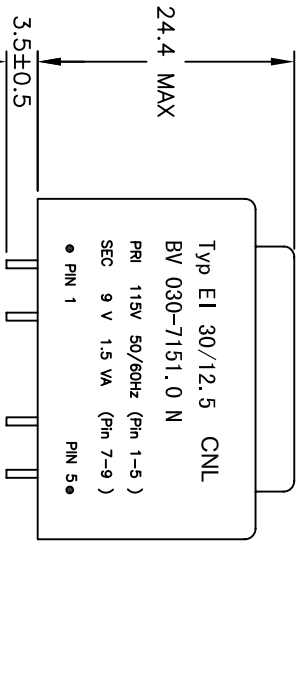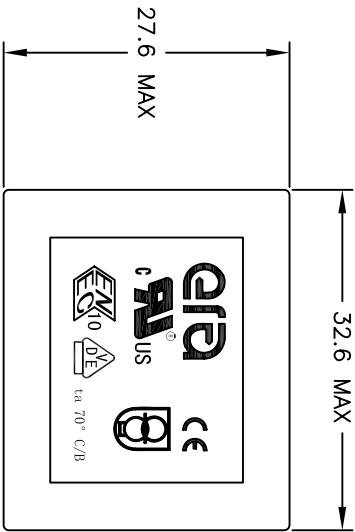

FINAL OUTLINE

DWG. NO.

030-7151-0

SHEET

1 OF 1

REV

14