
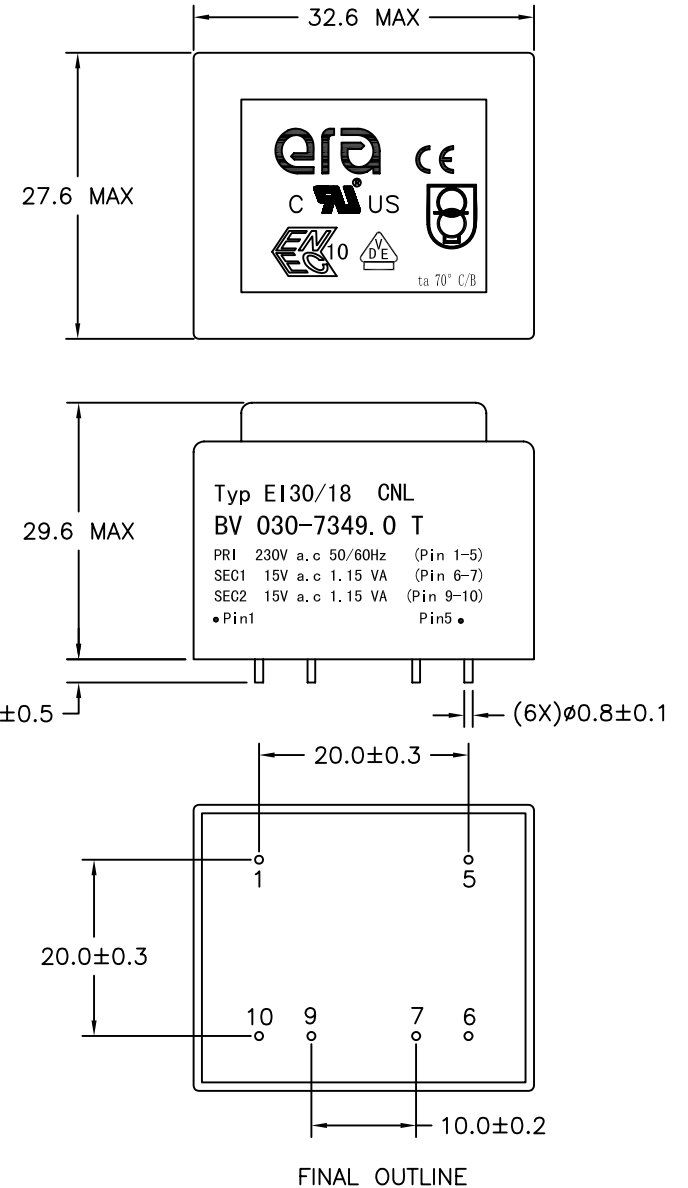


NOTES:

1. ALL DIMENSIONS ARE IN MM, GENERAL TOLERANCE IS 0.20MM;
2. ALL PINS LENGTH DON'T COUNT TIN ICICLES;
3. ELECTRICAL CHARACTERISTICS:  
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C  
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	I <sub>o</sub> : @ NO LOAD	INPUT 230 V, 50Hz	MAX 13.10	mA
2	P <sub>w</sub> : @ NO LOAD	INPUT 230 V, 50Hz	MAX 0.95	W
3	U <sub>o1</sub> : @ NO LOAD	INPUT 230 V, 50Hz	24.40±10%	V
4	U <sub>o2</sub> : @ NO LOAD	INPUT 230 V, 50Hz	24.40±10%	V
5	I: @ CURRENT WITH LOAD	INPUT 230 V, 50Hz	MAX 25.25	mA
6	P <sub>w</sub> : @ WATTAGE WITH LOAD	INPUT 230 V, 50Hz	MAX 6.10	W
7	U1: @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 77 mA	15.0	V
8	U2: @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 77 mA	15.0	V
9	HI-POT: (1,5) TO (6,7)	/	4000VAC, 2 SEC	
10	HI-POT: (1,5) TO (9,10)	/	4000VAC, 2 SEC	
11	HI-POT: (6,7) TO (9,10)	/	1000VAC, 2 SEC	
12	RATED OUTPUT POWER	/	2.3	VA



UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES. TOLERANCES ARE:  
 DECIMALS: .XX ±0.1 ±1°  
 .XXX ±.005  
 ANGLES: ±1°  
 DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
NONE		030-7349-0	14
SCALE	CADD FILE	SHEET	1 OF 1