038-5416-0

NOTES:

ELECTRICAL CHARACTERISTICS:
UNLESS OTHERWISE SPECIFIED, TESTING IS PERFORMED AT 25°C ±5°C
(FOR REFERENCE ONLY. USED FOR CUSTOMER INFORMATION)

ITEM	SPECIFICATION	TEST CONDITIONS	VALUE	UNIT
1	Io: @ NO LOAD	INPUT 230 V, 50Hz	24.15 MAX	mA
2	Pwo: @ NO LOAD	INPUT 230 V, 50Hz	1.50 MAX	W
3	Uo: @ NO LOAD	INPUT 230 V, 50Hz	24.20 ±5%	V
4	Ie:@CURRENT WITH LOAD	INPUT 230 V, 50Hz	39.90 MAX	mA
5	Pwe:@WATTAGE WITH LOAD	INPUT 230 V, 50Hz	9.85 MAX	W
6	Ua: @ NOMINAL LOAD	INPUT 230 V, 50Hz AT LOAD 222 mA	18.0	V
7	HI-POT: (1,5) TO (7,9)	/	4000VAC, 2 SEC	/
8	RATED OUTPUT POWER	/	4.0	VA

MECHANICAL SPEC NOTES:

1. ALL DIMENSIONS ARE IN MM,GENERAL TOLERANCE IS ±0.20MM.
2. ALL PIN LENGTH DON'T INCLUDE TIN ICICLE.



SCHEMATIC

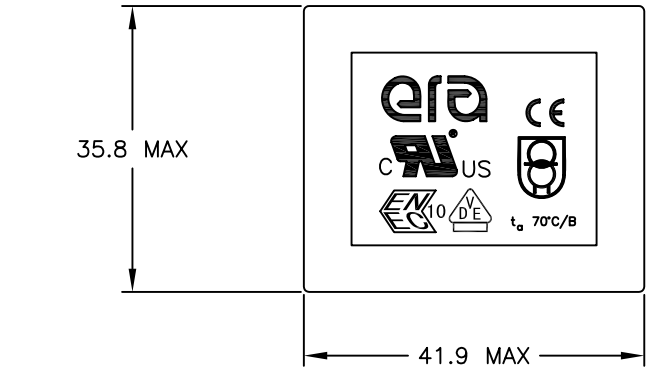

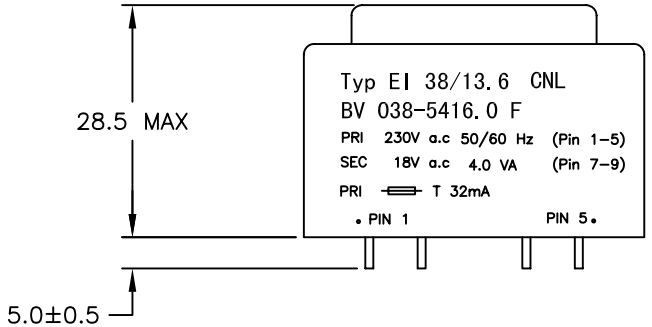

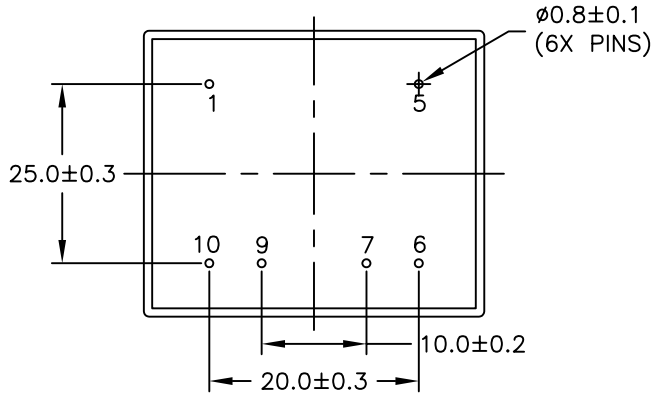

UNLESS OTHERWISE SPECIFIED, ALL DIMENSIONS ARE IN INCHES TOLERANCES ARE:
DECIMALS .XX ±.01 .XXX ±.005
ANGLES ± 1°
DO NOT SCALE DRAWING

SIZE	CAGE CODE	DWG. NO.	REV
B	01961	038-5416-0	13
SCALE NONE	CADD FILE	SHEET 1 OF 1	

120CT2004